

# MGE Galaxy 300

3:3-phase: 10/15/20/30/40 kVA, 3:1-phase: 10/15/20/30 kVA

Effective and reliable three-phase power protection designed to prevent downtime and data loss for mission-critical applications.



## MGE Galaxy 300 – reliability you can trust.

The MGE Galaxy™ 300 provides an effective and reliable solution for protecting small server rooms, commercial buildings, and technical facilities. The online double-conversion topology supplies true isolation between input and output with a zero transfer time. Available with integrated batteries or external batteries with robust charger, the UPS includes an internal mechanical bypass and simplified parallel capability for higher levels of availability. Remote and local monitoring/management capability is achieved through a built-in communication card with a simple Web/SNMP interface and a user-friendly display available in 18 languages. Both 3:3- and 3:1-phase configurations are available for convenient power distribution. Serviceability is greatly enhanced by front access for ease of maintenance in confined spaces. The Galaxy 300 has been ruggedized with conformance-coated boards and dust filter to better withstand harsh environments. All of these features, along with the included start-up services and on-site warranty, make the MGE Galaxy 300 the easiest UPS in its class to install, manage, and maintain.

# Features and benefits

## MGE Galaxy 300

### Availability

**Dual mains input** Allows standard installation of one or two independent power sources

**Automatic internal bypass** Built-in 100 percent rated static bypass switch, prevents interruption by allowing load transfer to utility power during heavy overloads

**Parallel 1+1 for redundancy** Connected equipment can be powered with two UPS units in parallel to increase system redundancy

**Ruggedized design** With conformance-coated boards and included dust filter to better withstand harsh environments

**Integrated battery backup** Provides higher level of availability with up to 30 minutes of runtime

**A robust charger** Provides all-in-one solution for the most common runtime requirements

### Serviceability

**Manual maintenance bypass** Easily accessible maintenance bypass allows complete isolation of each part of the system, facilitating maintenance operations without power interruption

**Front-access servicing** Push-open door and slide-out boards simplify installation and maintenance while minimizing space requirements

**World-class service organization** With worldwide support and multiple levels of after-sales services, our package or individual on-site service options are structured for you to choose what APC™ by Schneider Electric™ can do for you

### Economy

**Power factor corrected input** Prevents the need for oversizing cables, circuit breakers, and generator

**Temperature-compensated battery charging** Sensors monitor battery temperature and adjust charger voltage to prevent premature aging and extend battery lifetime

**Reduced footprint** Compact wide or narrow tower makes best use of available space

### Simplified installation

**Easy to install** Wheeled unit rolls into place — all wiring connections are easily identifiable for time-saving installation

**Start-up wizard** Step-by-step guidance and intuitive menu screens for easy set-up and system navigation

### Manageability

**Built-in management card for SNMP** Remote and local monitoring and management capabilities with simple Web/SNMP interface

**User-friendly graphical interface** Easy-to-read LCD provides mimic diagrams, audible alarms, and multi-language display — simplifying operation

## Typical applications

- Small and medium businesses
- Commercial buildings: shop floors, hotels, and convention centers
- Transportation and infrastructures
- Telecommunication
- Technical facilities

## Runtime options

- UPS for integrated batteries: supplied with shelves and battery breakers to easily integrate batteries in the UPS cabinet (bottom) — typically for runtimes up to 30 minutes
- UPS with robust charger for external batteries: to be used with batteries on rack or in external cabinet — for runtimes up to four-plus hours


# MGE Galaxy 300

## Economy

**Optimized features** The MGE Galaxy 300 is designed to provide optimal performance. The most in-demand features have been carefully selected to propose the right solution for predictable and reliable power protection, offering the benefits of a true double-conversion, on-line architecture

**Reduced footprint** Narrow and wide tower options optimize the system footprint based on kVA power requirements

**Simplified maintenance:** A full maintenance bypass with front access permits complete isolation of each part of the system and facilitates maintenance operations without power interruption

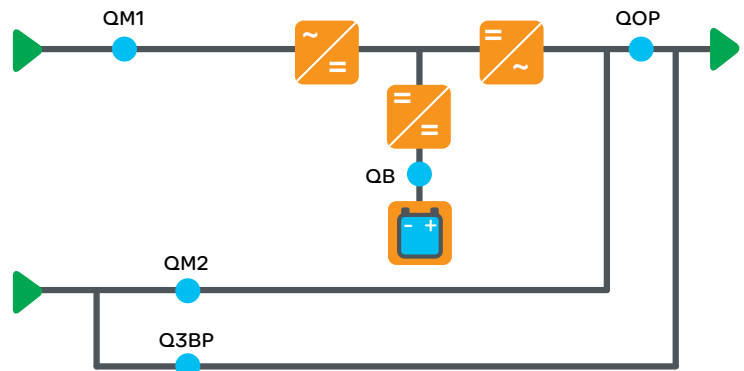

## StruxureWare for Data Centers Software Suite

In the data center environment, our Galaxy 300 is fully managed through StruxureWare™ for Data Centers software, an integrated suite of data center infrastructure management (DCIM) applications. It enables businesses to prosper by managing their data centers across multiple domains, providing actionable intelligence for an ideal balance of high availability and peak efficiency throughout the entire data center life cycle. StruxureWare software applications and suites are a key element of Schneider Electric EcoStruxure™ integrated hardware and software system architecture — a system designed for intelligent energy management.



## Options

**External battery cabinet for additional runtime**  
Supplied with breakers and temperature sensors

**Parallel kit For 1+1 parallel redundancy**  
(G3HTPARKITS)

**Empty cabinet for third-party batteries or transformers**  
Line up and match cabinet for third party batteries and transformers

### Communication cards

- Network Management Card supplied with the product (AP9630) for Web/SNMP functions
- Optional card (AP9635CH) for additional features such as Modbus/Jbus over RS485, Teleservice, and environmental sensors: Temperature (AP9335T), Temperature and Humidity (AP9335TH), Dry contact I/O (AP9810)

## A Comprehensive Portfolio of Services

Schneider Electric Critical Power & Cooling Services (CPCS) provides the expertise, services, and support you need for your building, industry, power, or data center infrastructure. Our world-class life cycle services offer a smart way to install and maintain your critical applications, ensuring your systems are always running at peak performance.



# Technical specifications

Rated power (kVA/kW)	10/8	15/12	20/16	30/24	40/32
<b>Normal ac supply input</b>					
Input voltage (V)	380/400/415 V (three-phase + neutral)				
Frequency (Hz)	45 – 65 Hz				
Input power factor	Up to 0.99 At >50% load				
THDI	<7% At full load				
Input voltage tolerance utility operation	340 V to 477 V at full load ( -15% to +20% at 400 V)				
Dual mains input	Yes				
<b>Output</b>					
Nominal output voltage (V)	3:1 – 220/230/240 V				N/A
	3:3 – 380/400/415 V (three-phase + neutral)				
Efficiency at full load (online)	Up to 93%				
Output frequency	Mains synchronized in normal operation 50 Hz or 60 Hz + 0.1% Free-running				
Overload capacity utility operation	125% For 2 minutes, 150% for 10 seconds				
Output voltage tolerance	+2% Static, +5% at 100% load step				
<b>Communication and management</b>					
Communication interface	Network management card (AP9630)				
Control panel	Multi-function, LCD status and display console				
<b>Dimensions and weight</b>					
UPS dimensions (H x W x D) – 3:1	51.18 x 15.75 x 37.40 in.		51.18 x 19.69 x 37.4 in.		N/A
UPS dimensions (H x W x D) – 3:3	51.18 x 15.75 x 37.4 in.		51.18 x 19.69 x 37.4 in.		
UPS weight (lb.) without batteries (3:1/3:3)	330.69/297.62 lb.		418.88/297.62 lb.		447.54 lb.
UPS maximum weight (lb.) with integrated batteries	1,366.87 lb.				
Battery cabinet dimensions (H x W x D)	51.18 x 25.98 x 33.46 in.				
Battery cabinet - minimum weight	231.49 lb.				
Battery cabinet - maximum weight	1,344.82 lb.				
<b>Regulatory</b>					
Safety	IEC/EN 62040-1-1				
EMC/EMI/RFI	IEC 62040-2				
Approvals	CE, TUV				
<b>Environmental</b>					
Operating temperature	32°F to 95°F				
Relative humidity	0 to 90% non-condensing				
Operating elevation	0 to 3,280.84 ft. at 100% load				
Max. audible noise at 3.28 ft. from unit	54 dBA at 100% load			53 dBA at 100% load	
Protection class	IP20				